


# MOUNT



Apply Loctite 243 or similar thread-locker on all bolts!  
Tighten with specified torque.

# MAINTAIN

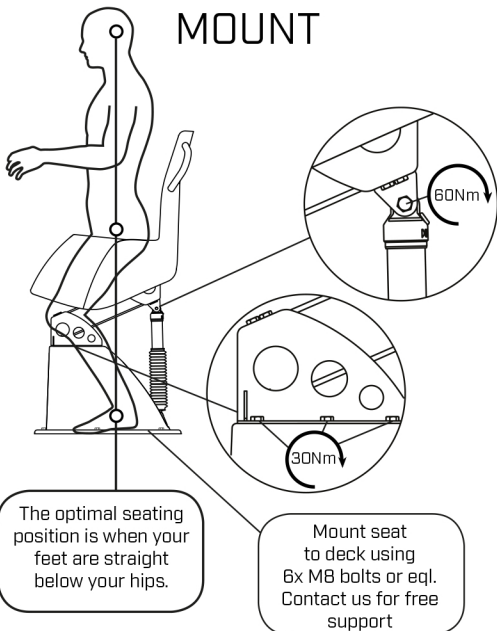

## WEATHER PROTECTION COVER

Remove the cover before flight. Put on after use. Proper use of this cover will increase the lifetime of the upholstery. For permanent protection, use Ullman Cordura® cover



## FRESH WATER RINSE

If the seats have been heavily exposed to salt water, rinse with fresh water. All parts are 100 % corrosion free. Put on cover when seat is dry.



## FUNCTION CHECK (100h)

1. Check dampers for oil leakage  
2. Jump on seat to try to bottom it out. Contact us if the seat bottoms or if there is leakage.



[www.ullmandynamics.com](http://www.ullmandynamics.com)

Telephone: +46 31708 2600

WhatsApp/iMessage: +46 70160 9063

Email: [request@ullmandynamics.com](mailto:request@ullmandynamics.com)

Visit: Talattagatan 16, Göteborg, Sweden